


FULL LED HEADLIGHT UNIT

Dear user, thank you for choosing an EVOK product!

For a correct connection of your new EVOK Full Led Headlight unit, we recommend you to read this leaflet carefully.

The FULL LED headlight for Vespa PX is supplied with a special voltage converter, which makes assembly simple and Plug & Play. It will therefore not be necessary to keep the original lamp holder, all the connections will be transferred to the new EVOK voltage converter.

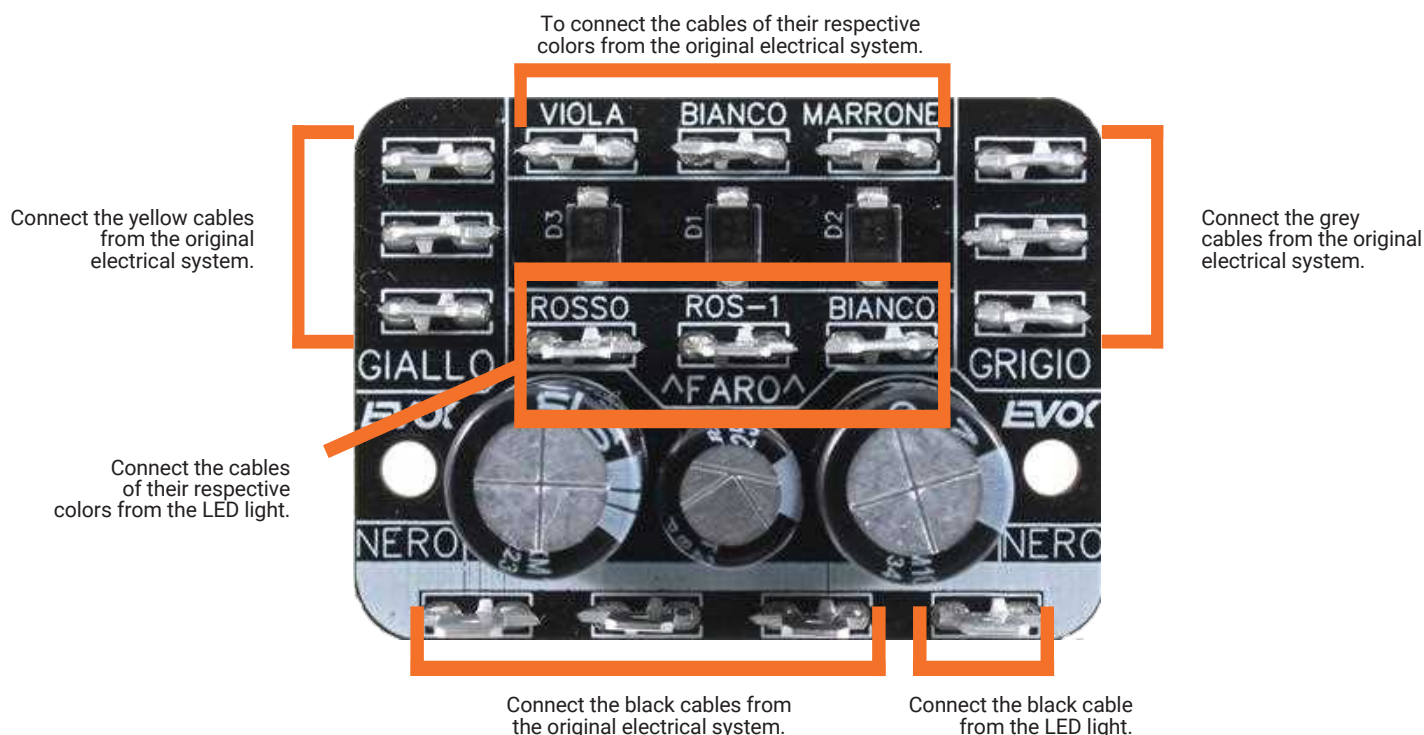

Start with the connection of the headlight and the electrical system to the voltage converter, respecting the following instructions:

- Disconnect all the cables coming from the electrical system from the original lamp holder and then remove it.
- Remove the 2 side fixing tabs from the original light, and reposition them on the new EVOK light unit using the supplied screws.
- Place the new EVOK optical unit in the light housing.
- In the lower terminal block of the converter (NERO), starting from the left, connect the BLACK cables coming from the original electrical system; the BLACK cable of the LED light will be connected to the first pin on the right of the same terminal block. (SEE PHOTO)
- Connect the GRAY cables from the original electrical system to the GRIGIO terminal board.
- Connect the YELLOW cables from the original electrical system to the GIALLO terminal board.
- Connect the PURPLE (VIOLA), WHITE (BIANCO) and BROWN (MARRONE) cables from the original electrical system to the upper terminal block, respecting the colors indicated on the voltage converter. (SEE PHOTO)
- In the central terminal board called ^FARO^, connect the cables coming from the EVOK optical unit respecting the colors indicated (Red = ROSSO - White = BIANCO).

TECHNICAL FEATURES



- 12V - 25W – 2.4 A.
- UP TO 7000 LM POWER.
- LED 6000K - COLD WHITE LIGHT.
- HEADLIGHT DIAMETER 148 mm.

WARRANTY: The warranty is limited to the replacement of the defective parts approved from RMS S.p.a For any reason, an EVOk product could not be fitted on a vehicle where there's no application. Warranty is not valid in the following circumstances:

- Any type of modification of the EVOk product.
- Incorrect mounting or use.
- Changing of any part of the kit with other competitors part.
- Improper use of the product.

RMS S.p.A., owner of EVOK brand, reserves the right to make changes and improvements to the product, even without prior notice.

